






Grating manufactured from 40 x 10 flat at 75mm centres spaced 50mm away from the back wall. Fully Welded and hot dip galvanised.


**SPILLWAY HEADWALL  
H6C B (DRAINAGE OUTFALL)**

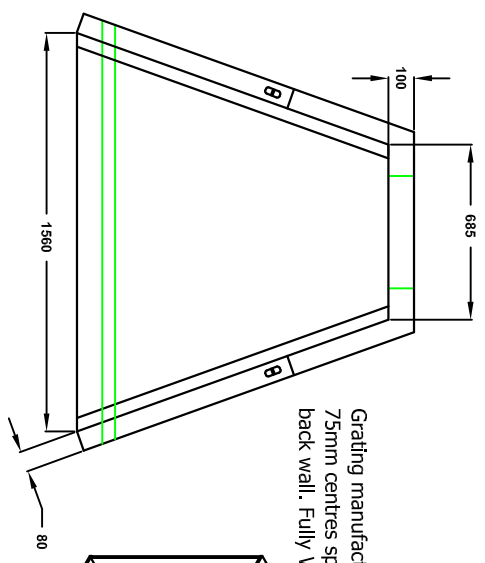



Detail 'B'

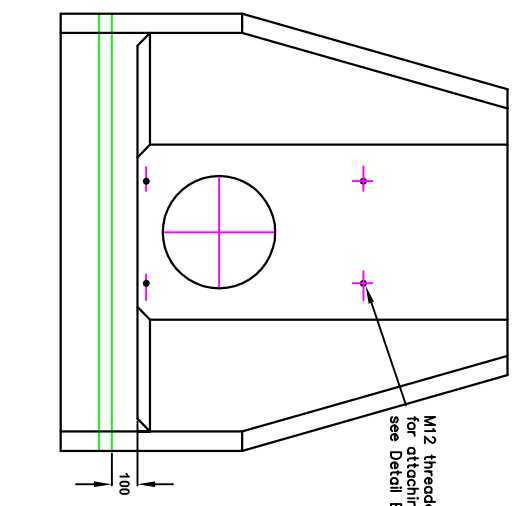

M12 threaded socket for attaching grating see Detail B

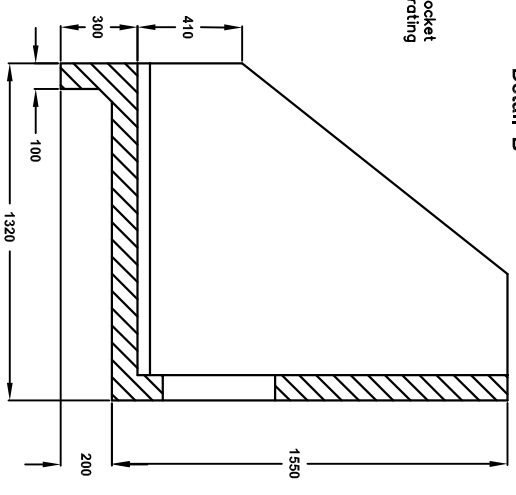

Lifting ring clutch

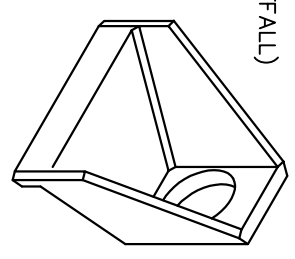

Detail 'A'  
Cast in Universal anchor point

**Installation**

Units should be bedded on minimum 100mm of semi-dry concrete. Sit the headwall level or with a slight fall 1:50 from pipe to spill mouth. For full detailed installation instructions contact ALTHON Ltd, 01603 488700

Material: Reinforced concrete  
Weight approximately 940kg

All dimensions in mm

**Althon Ltd**  
**Vulcan Rd South**  
**Norwich NR6 6AF**  
**t: 01603 488700**  
**f: 01603 488598**  
**www.althon.co.uk**