

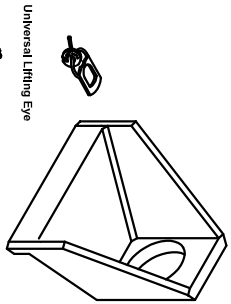
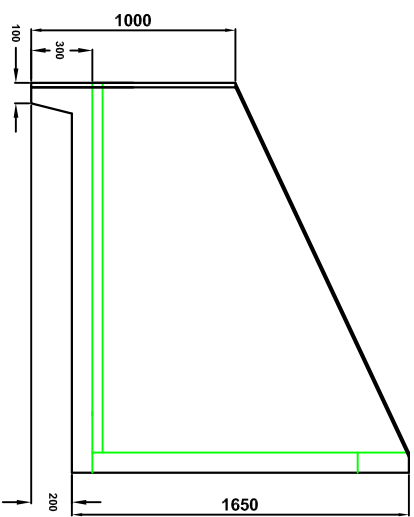


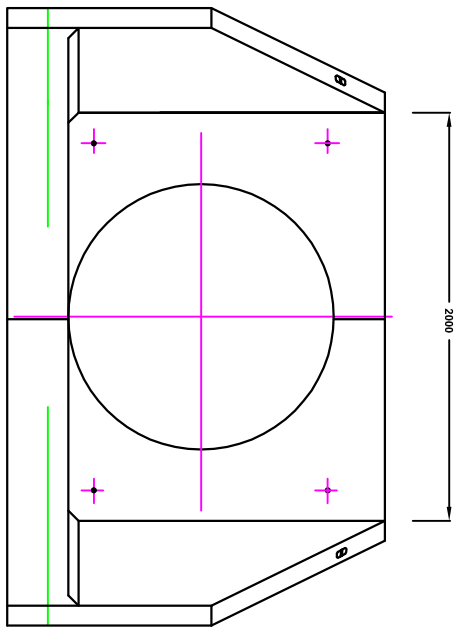

SPILLWAY HEADWALL
H20C B
(DRAINAGE OUTFALL)

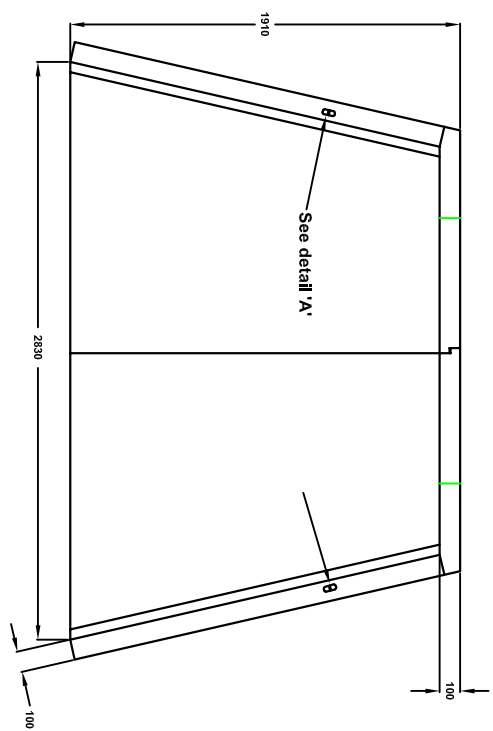

Universal Lifting Eye
Detail 'A'
Cast in' anchor pin

Installation

Units should be bedded on minimum 100mm of semi-dry concrete. Sit the headwall level or with a slight fall 1:50 for a pipe to spill installation. For details of spill installation instructions contact ALTHON Ltd, 01603 488700

Material: Reinforced concrete
Weight approximately 3400kg

All dimensions in mm

Althon Ltd
Vulcan Rd South
Norwich NR6 6AF
t: 01603 488700
f: 01603 488598
www.althon.co.uk